



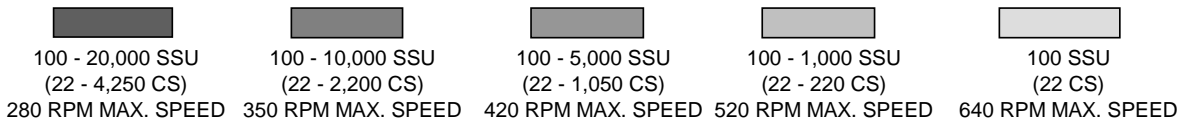


Page Number	201-027
Effective	May 2016
Replaces	Oct 2001
Section	201

FLOW AT 50 PSI (3.45 Bar)

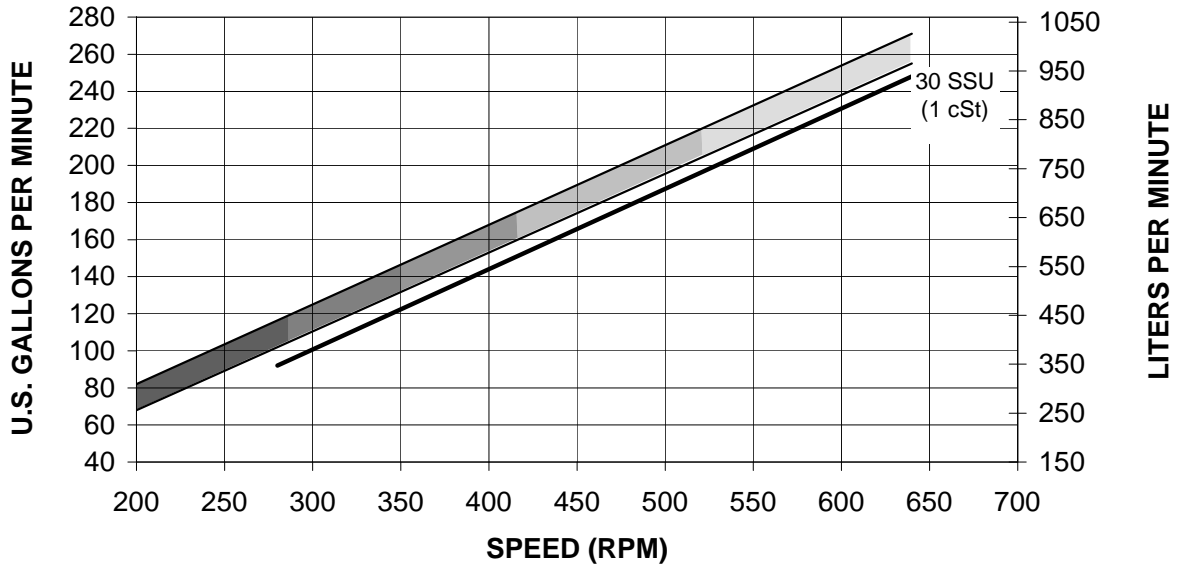

TORQUE REQUIRED AT 50 PSI (3.45 Bar)

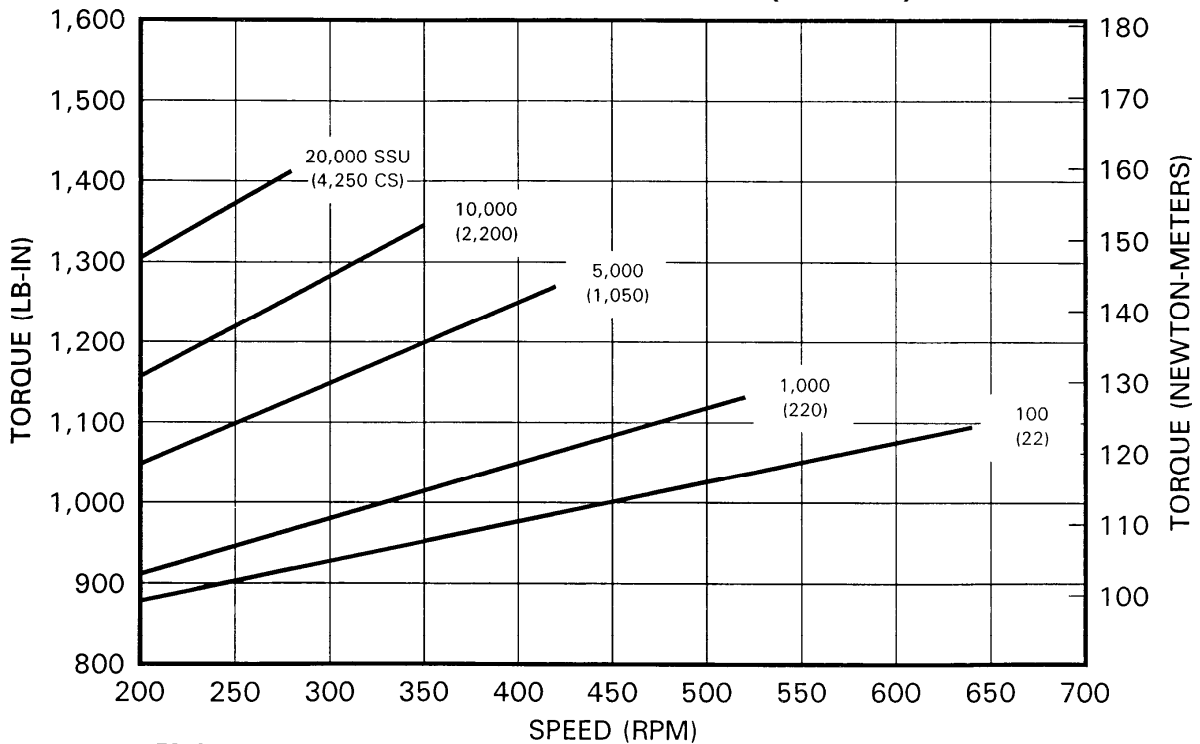


$$HP = \frac{\text{TORQUE (LB-IN)} \times \text{RPM}}{63025}$$

CHARACTERISTIC CURVES


Models: TXD3, TXSD3

FLOW AT 100 PSI (6.89 Bar)

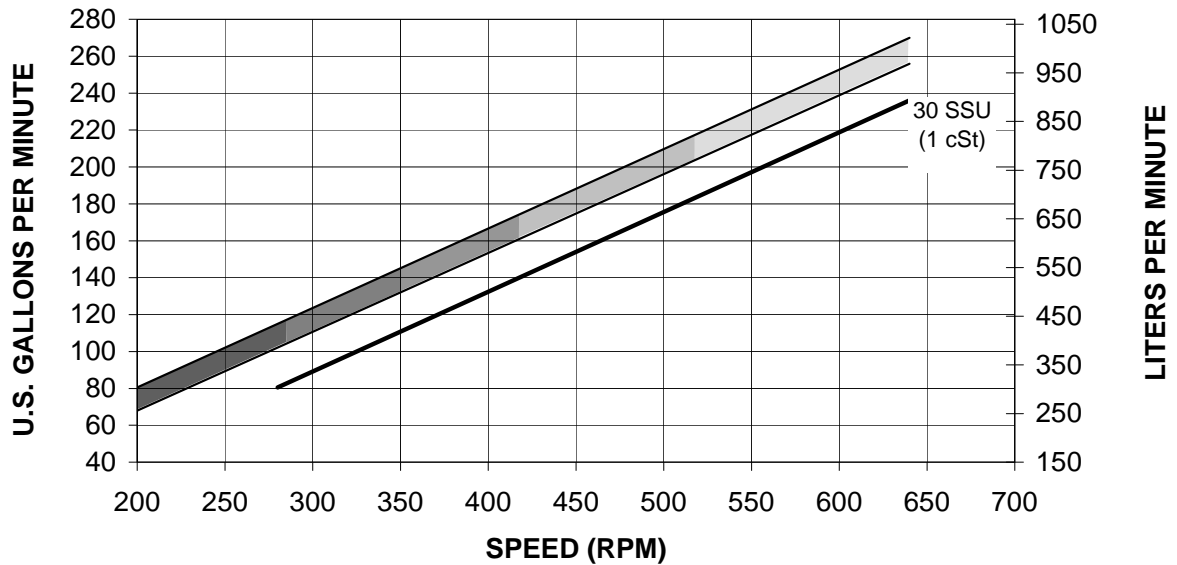

100 - 20,000 SSU (22 - 4,250 CS) 280 RPM MAX. SPEED
 100 - 10,000 SSU (22 - 2,200 CS) 350 RPM MAX. SPEED
 100 - 5,000 SSU (22 - 1,050 CS) 420 RPM MAX. SPEED
 100 - 1,000 SSU (22 - 220 CS) 520 RPM MAX. SPEED
 100 SSU (22 CS) 640 RPM MAX. SPEED

TORQUE REQUIRED AT 125 PSI (8.62 Bar)

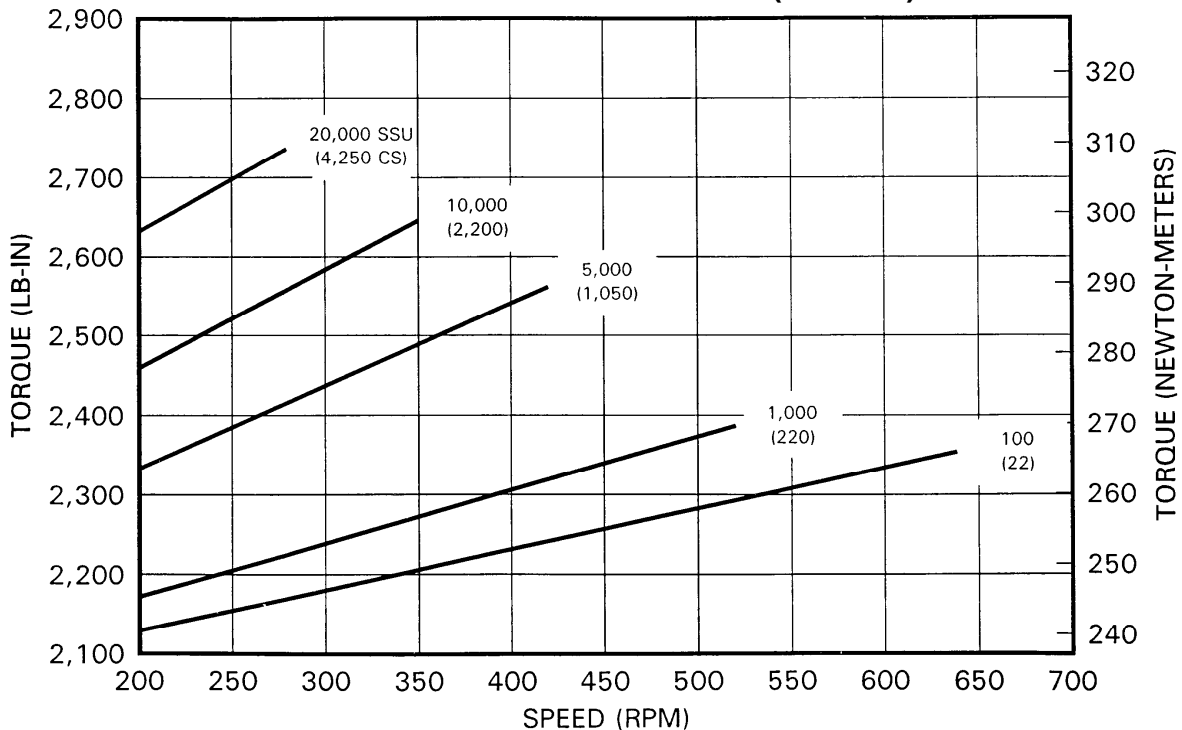

$$HP = \frac{TORQUE (LB-IN) \times RPM}{63025}$$

